




COMMUNITY DEVELOPMENT DEPARTMENT • BUILDING INSPECTION DIVISION  
500 Castro Street • Post Office Box 7540 • Mountain View, California 94039-7540  
650-903-6313 • FAX 650-962-8501

## SKYLIGHT FRAMING DETAIL Roof Framing Around Openings

2013 California Residential Code, Section R802.9

2013 California Building Code, Section 2308.10.4.3

- Headers with a span exceeding 4' must be framed with trimmers and header rafters that are doubled or of lumber of equivalent cross-section.
- The ends of header rafters more than 6' in length shall be supported by framing anchors or rafter hangers unless the rafters bear on a beam, partition or wall.

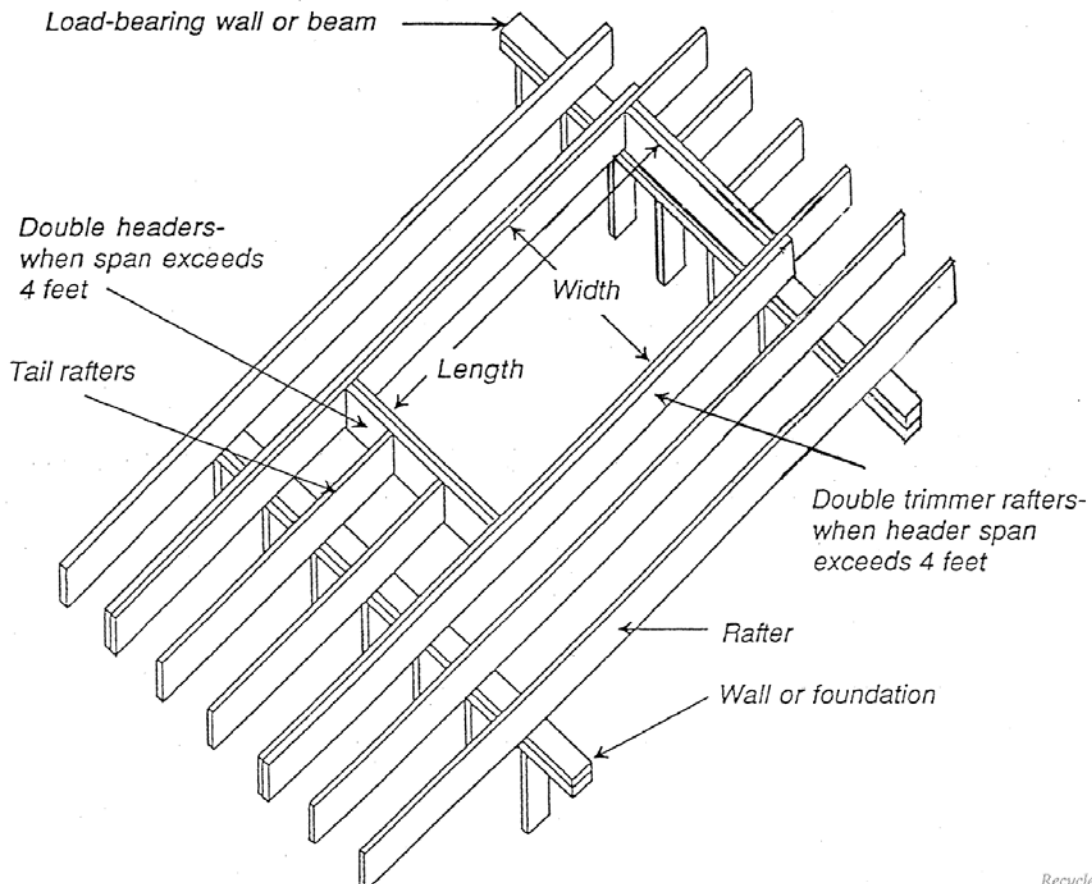

Recycled F